


Phase Sequence Indicator(Contact Type)



862 PR

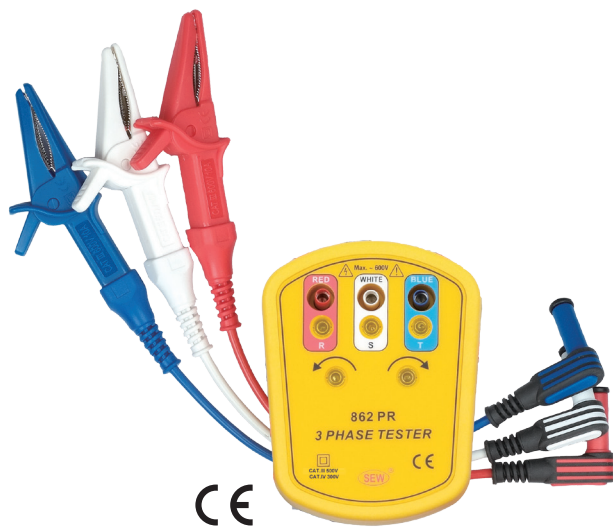

863 PR

FEATURES

- Two functions in one unit: open phase and phase sequence detection.
- Neon light indicators.
- Large size alligator clips for easy clipping onto switchboards terminals.
- Checks a wide range of 3-phase power sources.
- Ideal for installing conveyor lines, pump systems and interconnected drivers.
- Waterproof design, protection class : IP24.
- Special test leads length are available on request.

SPECIFICATIONS

	862 PR	863 PR
Input voltage	100-500V AC	100-500V AC
Frequency range	45 - 70 Hz	45 - 70 Hz
Circuit structure	All electronic (not mechanical)	
AC power consumption	Approx. 7mA	
Dimensions	102(L) × 78(W) × 32.5(D)mm	
Weight	862 PR : 115g Test leads : 97g Total : Approx. 212g	Approx. 228g
Safety standard	EN 61010-1 CAT III 500V / CAT IV 300V EN 61326-1	EN 61010-1 CAT III 500V EN 61326-1
Accessories	Instruction manual Test leads Soft pouch	Instruction manual Soft pouch



CAC-860 B